


Top View

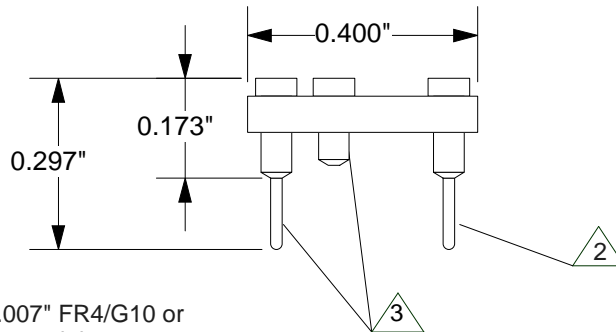

Side View


1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material.

2 Pins: shell material- Brass; shell finish- 10µ" Gold over 50µ" Nickel (min.). Contact material- Beryllium copper; contact finish 10µ" Gold over 100µ" Nickel (min.)

3 Pins: shell material- Brass; finish- 10µ" gold over 50µ" nickel (min.).

Description:  
Prototyping Adaptor-24 position gangable female sockets (zip footprint) to male pins (0.1" centers)

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

|                                                                                     |                                                                                                                                                 |                   |                |        |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------|--------|
|  | <b>PA-ZIP24-01 Drawing</b>                                                                                                                      | Status: Released  | Scale 3:1      | Rev: B |
|                                                                                     | © 1998 IRONWOOD ELECTRONICS, INC.<br>PO BOX 21151 ST. PAUL, MN 55121<br>TEL:(651) 452-8100 FAX:612-452-8400<br>WEB: www.ironwoodelectronics.com | Drawing: P Jasmin | Date: 06/27/89 |        |