


GHz BGA Socket - Direct mount, solderless

Top View

28.225mm

A

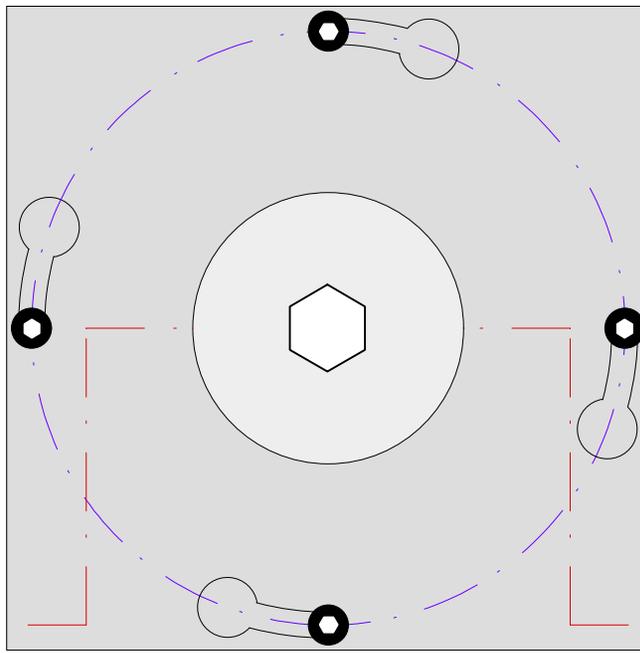

28.225mm

A


Features

- Directly mounts to target PCB (needs tooling holes) with hardware.
- High speed, reliable Elastomer connection
- Minimum real estate required
- Compression plate distributes forces evenly
- Ball guide prevents over compression of elastomer
- Easily removable swivel socket lid

Side View
(Section AA)

Assembled
8.25mm +
IC thickness

Recommended torque = 3 in lbs.

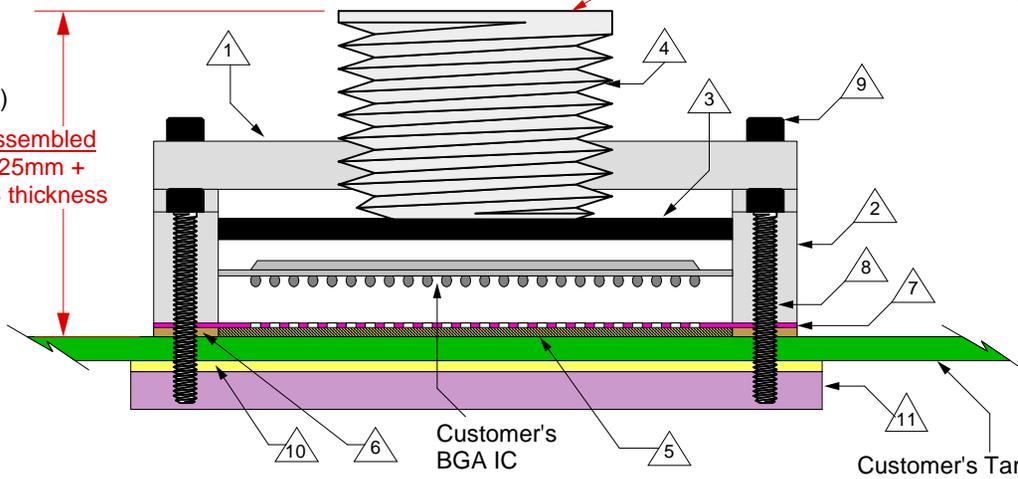

- | | |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Socket Lid: Black anodized Aluminum.
Thickness = 2.5mm. |
| 2 | Socket base: Black anodized Aluminum.
Thickness = 5mm. |
| 3 | Compression Plate: Black anodized Aluminum.
Thickness = 2.5mm. |
| 4 | Compression screw: Clear anodized Aluminum.
Thickness = 5mm, Hex socket = 5mm. |
| 5 | Elastomer: 40 micron dia gold plated brass
filaments arranged symmetrically in a silicone
rubber (63.5 degree angle).
Thickness = 0.75mm. |
| 6 | Elastomer Guide: Non-clad FR4.
Thickness = 0.725mm. |
| 7 | Ball Guide: Kapton polyimide. |
| 8 | Socket base screw: Socket head cap, Alloy steel with
black oxide finish, 0-80 fine thread, 12.7mm long. |
| 9 | Socket lid screw: Shoulder screw, 18-8 SS, 0-80 fine
thread. |
| 10 | Insulation Plate: FR4/G10, Thickness = 1.59mm. |
| 11 | Backing Plate: Black anodized Aluminum.
Thickness = 6.35mm. |

SG-BGA-6007 Drawing

Status: Released

Scale: -

Rev: G



© 2009 IRONWOOD ELECTRONICS, INC.
11351 Rupp Drive, Suite 400, Burnsville, MN 55337
Tele: (952) 229-8200
www.ironwoodelectronics.com

Drawing: Meghann Fedde


Date: 8/16/01

File: SG-BGA-6007 Dwg.mcd

Modified: 7/6/09, AE

All tolerances: ±0.125mm (unless stated otherwise). Materials and specifications are subject to change without notice.

Recommended PCB Layout
Top View

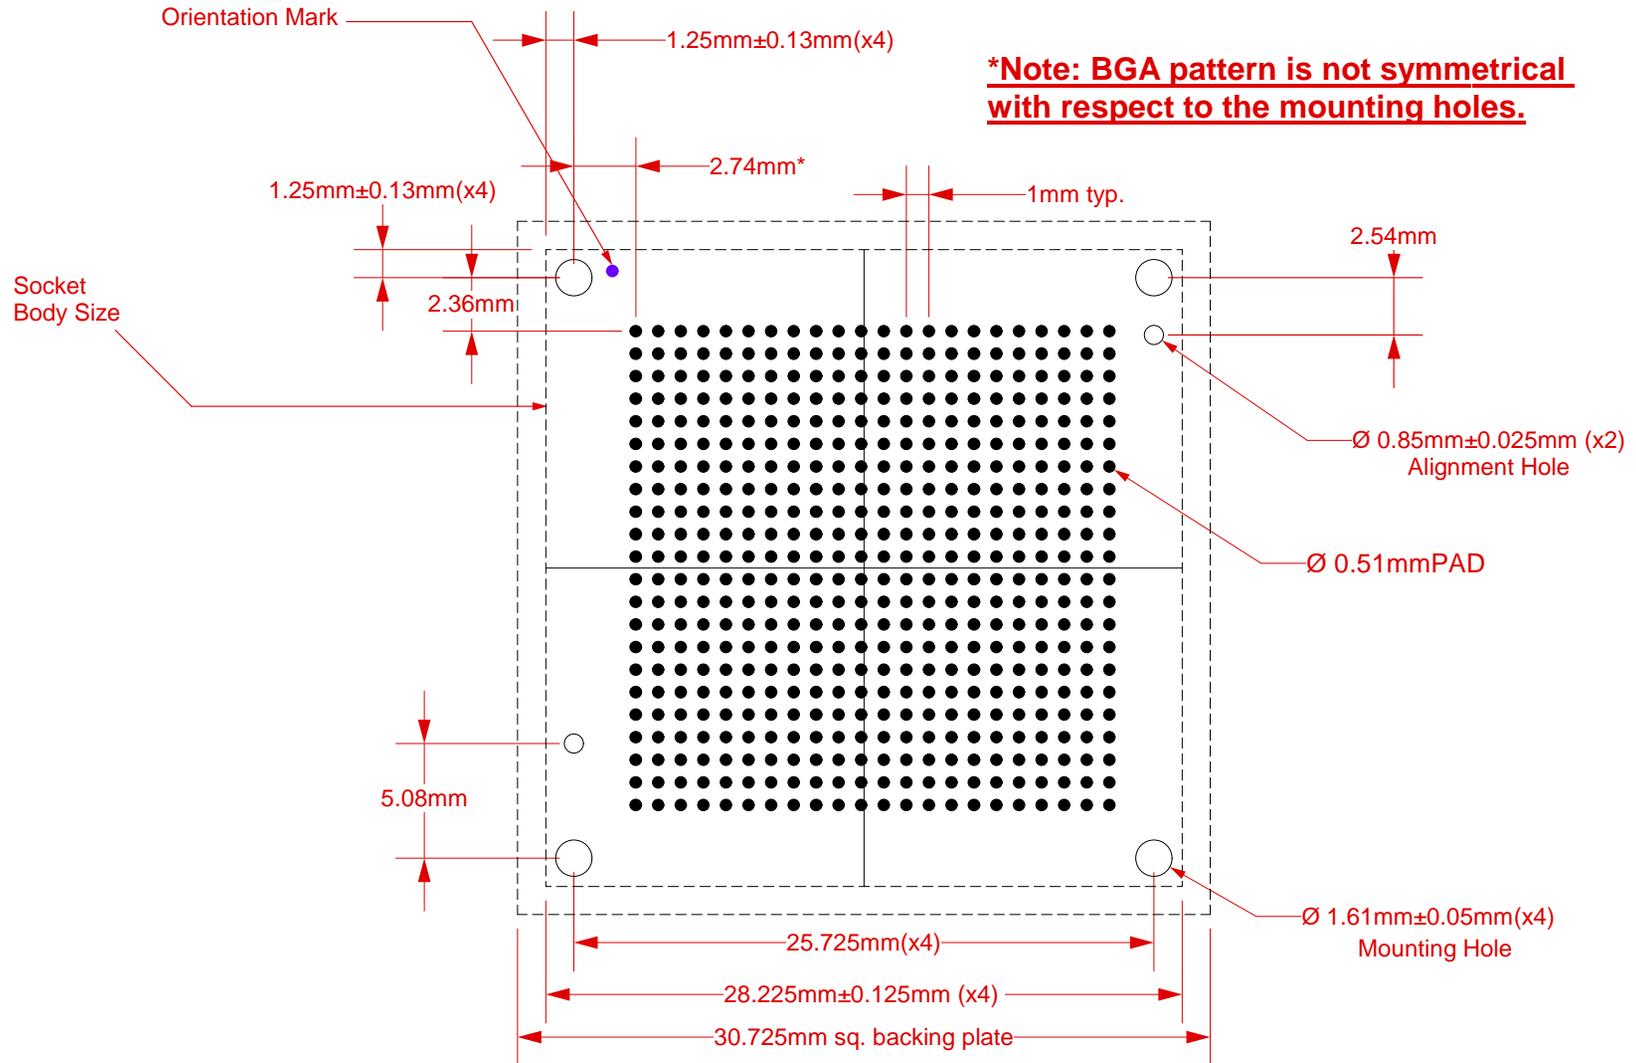





Target PCB Recommendations

Total thickness: 1.6mm min.
Plating: Gold or Solder finish
PCB Pad height: Same or higher than solder mask

NOTE: Steel backing plate may be required based on end user's application

Recommended PCB Layout Tolerances: ±0.025mm [±0.001"] unless stated otherwise.

 <p>© 2009 IRONWOOD ELECTRONICS, INC. 11351 Rupp Drive, Suite 400, Burnsville, MN 55337 Tele: (952) 229-8200 www.ironwoodelectronics.com</p>	<p>SG-BGA-6007 Drawing</p>		<p>Status: Released</p>	<p>Scale: 3:1</p>	<p>Rev: G</p>
	<p>Drawing: Meghann Fedde</p>		<p>Date: 8/16/01</p>		
	<p>File: SG-BGA-6007 Dwg.mcd</p>		<p>Modified: 7/6/09, AE</p>		

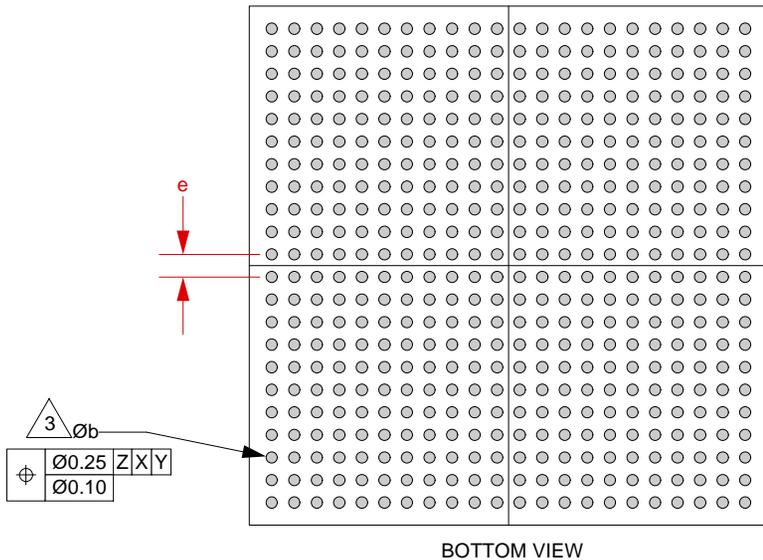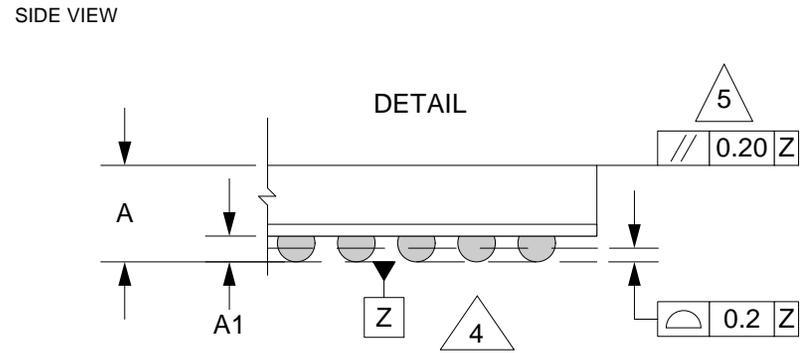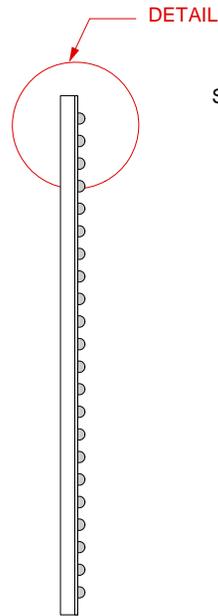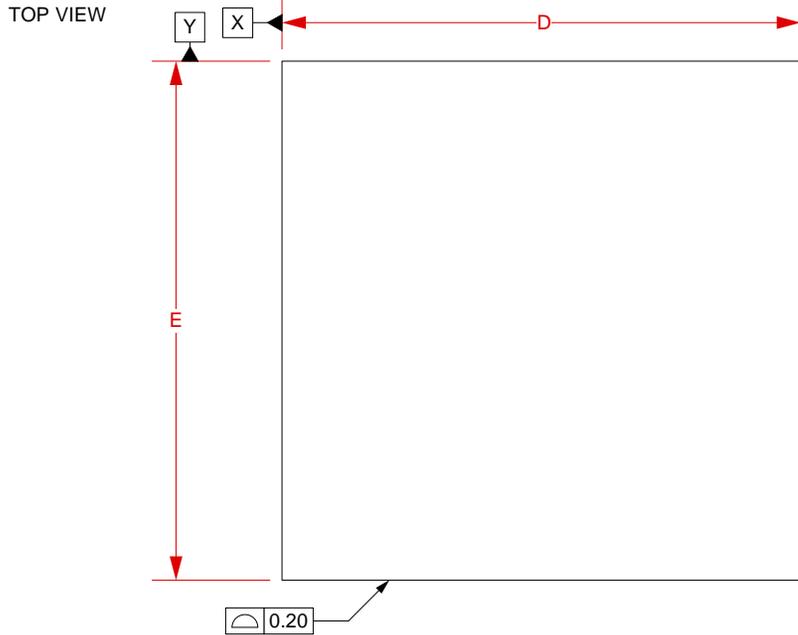


- 1 Dimensions are in millimeters.
- 2 Interpret dimensions and tolerances per ASME Y14.5M-1994.
- 3 Dimension b is measured at the maximum solder ball diameter, parallel to datum plane Z.
- 4 Datum Z (seating plane) is defined by the spherical crowns of the solder balls.
- 5 Parallelism measurement shall exclude any effect of mark on top surface of package.

DIM	MIN	MAX
A		2.5
A1	0.4	0.6
b		0.70
D	23.00 BSC	
E	23.00 BSC	
e	1.0 BSC	

Array 22x22

	SG-BGA-6007 Drawing	Status: Released	Scale: -	Rev: G
	© 2009 IRONWOOD ELECTRONICS, INC. 11351 Rupp Drive, Suite 400, Burnsville, MN 55337 Tele: (952) 229-8200 www.ironwoodelectronics.com	Drawing: Meghann Fedde		Date: 8/16/01
		File: SG-BGA-6007 Dwg.mcd	Modified: 7/6/09, AE	

Top View

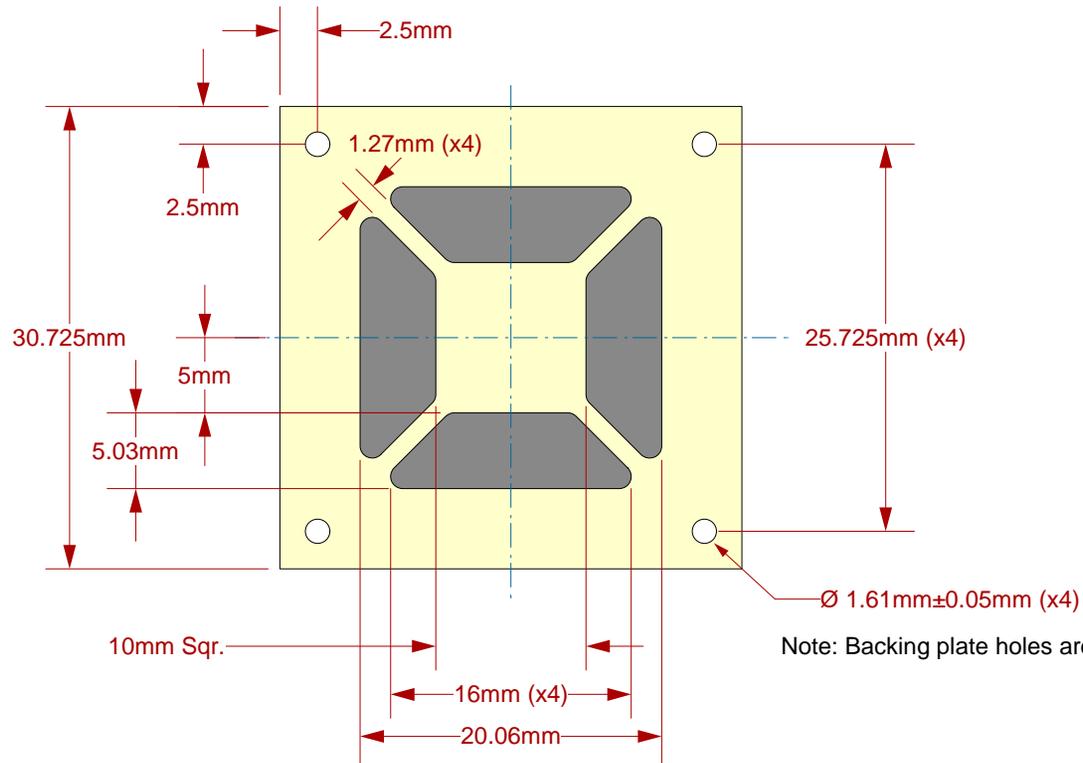

Side View



Description: Backing Plate with Insulation Plate

	SG-BGA-6007 Drawing	Status: Released	Scale: -	Rev: G
	© 2009 IRONWOOD ELECTRONICS, INC. 11351 Rupp Drive, Suite 400, Burnsville, MN 55337 Tele: (952) 229-8200 www.ironwoodelectronics.com	Drawing: Meghann Fedde		Date: 8/16/01
		File: SG-BGA-6007 Dwg.mcd	Modified: 7/6/09, AE	

All tolerances: $\pm 0.125\text{mm}$ (unless stated otherwise). Materials and specifications are subject to change without notice.